

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/20687 A1

(51) International Patent Classification⁷: **H01L 31/18**, (72) Inventor: STEVENSON, John (deceased).
C30B 25/02, 29/48

(21) International Application Number: PCT/GB00/03249

(22) International Filing Date: 22 August 2000 (22.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9921639.2 15 September 1999 (15.09.1999) GB

(71) Applicant (for all designated States except US): **THE SECRETARY OF STATE FOR DEFENCE** [GB/GB]; Defence Evaluation Research Agency, Ively Road, A4 Building, Farnborough, Hampshire GU14 0LX (GB).

(71) Applicant (for US only): **TURNEY, Saamara, Naomi** (heirress of the deceased inventor) [GB/GB]; The Hollies, 1 Kings Lane, Yelvertoft, Northants NN6 6LX (GB).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **HAILS, Janet, Elizabeth** [GB/GB]; DERA Malvern, St. Andrews Road, Malvern, Worcs WR14 3PS (GB). **COLE-HAMILTON, David, John** [GB/GB]; Chemistry Dept., University of St. Andrews, Purdie Building, North Haugh, St. Andrews, Fife KY16 9ST (GB). **BELL, William** [GB/GB]; Chemistry Dept., University of St. Andrews, Purdie Building, North Haugh, St. Andrews, Fife KY16 9ST (GB). **FOSTER, Douglas, Francis** [GB/GB]; Chemistry Dept., University of St. Andrews, Purdie Building, North Haugh, St. Andrews, Fife KY16 9ST (GB).

(74) Agent: **BOWDERY, A., O.**; D/IPD DERA Formalities, A4 Building, Ively Road, Farnborough, Hampshire GU14 0LX (GB).

(81) Designated States (national): GB, JP, KR, US.

[Continued on next page]

(54) Title: **NEW METHODS OF FABRICATING DEVICES AND SEMICONDUCTOR LAYERS COMPRISING CADMIUM MERCURY TELLURIDE, MERCURY TELLURIDE, AND CADMIUM TELLURIDE**

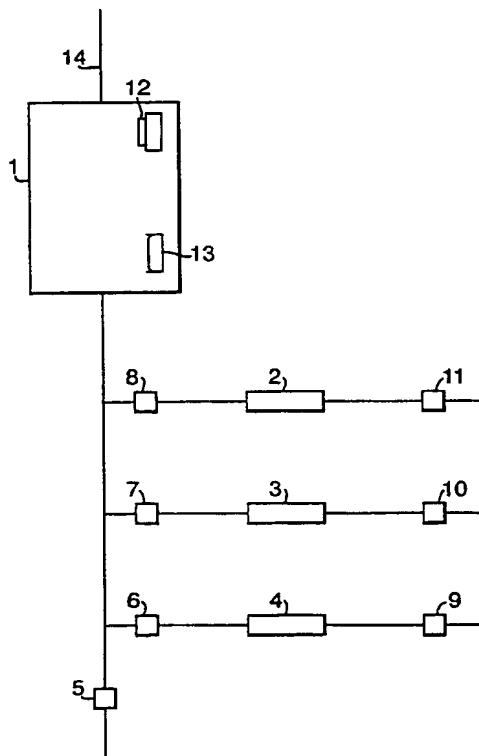

(57) Abstract: The invention relates to a method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ onto a substrate, in a MOVPE technique, where $0 \leq x \leq 1$; comprising the step of reacting together a volatile organotellurium compound, and one or both of (i) a volatile organocadmium compound and (ii) mercury vapour; characterised in that the organotellurium compound is isopropylallyltelluride. The invention also relates to devices, such as infrared sensors and solar cells, that comprise $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ materials.

WO 01/20687 A1



(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— With international search report.

New methods of fabricating devices and semiconductor layers comprising cadmium mercury telluride, mercury telluride, and cadmium telluride

The invention relates to a new methods of fabricating cadmium mercury telluride, mercury telluride, and cadmium telluride using isopropylallyltelluride as a precursor, by deposition on a substrate. The invention also relates to new devices comprising cadmium mercury telluride, mercury telluride, and cadmium telluride, and to methods of fabricating such devices. Finally, the invention relates to a new synthesis for isopropylallyltelluride.

Cadmium mercury telluride (CMT), mercury telluride (MT), and cadmium telluride (CT) are used in a number of electronic devices including infrared detectors. Cadmium telluride is also used in solar cells. These materials have the general formula: $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ where $0 \leq x \leq 1$. If $x=1$ then the material is cadmium telluride, if $x=0$ then the material is mercury telluride, if $0 < x < 1$ then the material is cadmium mercury telluride.

These telluride materials are commonly grown by metal organic vapour phase epitaxy (MOVPE) from organotellurium precursors. In the case of CMT an organocadmium compound, typically dimethylcadmium, and an organotellurium compound are heated with mercury in the vapour phase. The arrangement and conditions are such that the organometallic compounds react with each other, decompose, and react with the mercury resulting in deposition of CMT on a substrate.

The choice of the organotelluride used is critical to the production of these materials and devices.

There are a large number of organotellurium compounds that might be of value in deposition of CT/CMT/MT by MOVPE. One variant is that the organo groups could include alkyl, alkenyl, or aryl groups. Another variant is that compounds having

organo groups in the range C_1 to C_6 are all potential candidates as precursors. Yet another variant is the fact that the telluride may be symmetric or unsymmetric. Structural isomers add a final multiplier to the number of possible compounds that are candidates as MOVPE precursors.

5

A number of factors affect the suitability of an organotelluride as an MOVPE precursor.

10 The decomposition temperature of the organotelluride should be sufficiently low that the CMT, MT, and CT materials can be grown efficiently, but not so low that the organotelluride compound decomposes at relatively low temperatures. If the decomposition temperature is too low then this could present problems with regard to storage and handling of the organotelluride. The organotelluride should be sufficiently volatile that the material can be transported around the equipment in
15 which the CT, CMT, and MT is to be grown. However, if the organotelluride is too volatile then this can cause problems with storage and handling, for example the organotelluride may have to be cooled or maintained under pressure.

20 The decomposition temperature and volatility of the organotelluride affects the temperature at which MOVPE can be carried out. Preferably this MOVPE growth temperature for CMT should be lower than 370°C . Preferably the MOVPE growth temperature for CT should be lower than 350°C , for MT it should be lower than 370°C . The temperature should be relatively low for these materials for a number of reasons. The use of low temperatures results in lower concentration of Hg
25 vacancies in the CMT material. This results in lower carrier concentrations and reduces the need for annealing to remove such vacancies. Lower temperatures would also reduce diffusion of dopant elements in complex structures leading to more abrupt interfaces.

30 The first step in the decomposition of organotellurium compounds is thought to be the homolytic cleavage of a Te-C bond. This mechanism means that the generation

of undesirable by-products, as a result of reactions involving free radicals, is a problem for some organotellurium compounds. The telluride should therefore be chosen to minimise such by-products.

- 5 A number of factors affect the decomposition temperature, volatility, MOVPE temperature and generation of by-products.

- Bulky high molecular weight organo groups often result in a low decomposition temperature for the organotellurium compound. This factor must be weighed
10 against the fact that high molecular weight organotellurium compounds often have a low volatility. The decomposition temperature is also affected by the stability of the free radical resulting from homolytic cleavage. Stabilisation might occur as a result of delocalisation of the free radical across the whole molecule. This would suggest groups such as $\text{CH}_2=\text{CHCH}_2$ or $\text{CH}_2=\text{CHCH}=\text{CHCH}_2$ would be suitable.
- 15 The presence of dimethylcadmium can also affect the decomposition temperature of the organotellurium compound.

- The above illustrates that there are quite a large number of conflicting factors that affect which of the many organotellurium compounds would be suitable. The
20 complexity of this chemical system is illustrated by comparing the properties of diisopropyltelluride, diallyltelluride, and methylallyltelluride.

- Diisopropyltelluride is probably the precursor most commonly used for the growth of CT and CMT. The MOVPE growth temperature using the diisopropyl compound
25 and dimethylcadmium is typically 370°C for CMT. It might be thought that diallyltelluride would be an ideal precursor for CMT since it has a similar molecular weight to the diisopropyl compound but should yield a stable free radical. However it turns out that the diallyl telluride compound is unstable at room temperature, so that storage and handling of this compound is a problem. It might also be thought
30 that the low vapour pressure of diallyltelluride could be compensated by replacing one of the allyl groups with a methyl group. The synthesis of methylallyltelluride is

described in GB 2,249,790. Indeed the methylallyltelluride compound does have a very low decomposition temperature (20% decomposed at 300°C in hydrogen) and is volatile (5.98 Torr at 25°C) but unfortunately the process leads to highly undesirable by-products and does not yield CMT.

5

As mentioned above, the synthesis of methylallyltelluride is described in GB 2,249,790. The method disclosed in this document is suitable for the synthesis of other organo telluride compounds having mixed organo groups. The method involves the reversible reaction of R_2Te_2 with R'_2Te to give the compound $RR'Te$. A problem associated with this synthesis is that, if the boiling points of $RR'Te$ and R'_2Te are similar then the equilibrium of the reaction can not be driven completely to the $RR'Te$ product by distillation. This means that the product is contaminated with the starting materials.

10

15

The following items of prior art provide background information, including the disclosure of a synthesis of isopropylallyltelluride, relevant to this application: (a) Mat. Res. Soc. Symp. Proc. (1989) Vol 131, 69-73, (b) Magn. Reson. Chem. (1995), 33(6), 441-8, and (c) Organometallics (1991), 10(10), 3597-9.

20

It is an objective of this invention to provide a new method of fabricating MT, CT, and CMT layers and devices that reduces the above mentioned problems associated with the prior art methods.

25

According to a first aspect, the invention provides a method of depositing $Hg_{1-x}Cd_xTe$ onto a substrate, in a MOVPE technique, where $0 \leq x \leq 1$; comprising the step of reacting together a volatile organotellurium compound, and one or both of (i) a volatile organocadmium compound and (ii) mercury vapour; characterised in that the organotellurium compound is isopropylallyltelluride.

30

The method of depositing $Hg_{1-x}Cd_xTe$ can be used to fabricate MT, CT, and CMT electronic devices, such devices including solar cell, infrared emitter, and infrared

sensing devices. If $x = 0$ then the isopropylallyltelluride is reacted with mercury vapour in the absence of an organocadmium compound, the MOVPE reaction resulting in mercury telluride. If $x = 1$ then the isopropylallyl compound may be reacted with the organocadmium compound in the absence of mercury vapour, the MOVPE reaction resulting in cadmiumtelluride. The fabrication of CT by this method may also be assisted by the presence of mercury vapour.

This method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ is particularly advantageous because the temperature at which the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ layer or layers are deposited is low. The method enables the efficient deposition of polycrystalline CdTe. The method also alleviates the production of undesirable by-products and promotes the efficient deposition of MT and CMT.

Preferably the organocadmium compound is an alkyl cadmium compound, more preferably the alkyl cadmium compound is dimethyl cadmium.

Advantageously the substrate comprises one of the materials selected from: glass, glass coated with indium tin oxide, CdTe, CdZnTe, GaAs, GaAs/Si, CdTe/GaAs, CdTe/Si, CdTe/ZnTe/Si, and Si.

The temperature of the substrate during the MOVPE deposition is, preferably, maintained at a temperature in the range 150°C to 350°C ; more preferably the temperature of the substrate is in the range 250°C to 300°C ; and yet more preferably the substrate temperature is in the range 150°C to 300°C .

According to a second aspect, the invention provides a method of fabricating an electronic device comprising the steps of (a) depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ onto a substrate by the above mentioned method, according to the invention, of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$; and (b) connecting at least two electrodes to the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$.

The connection of the electrodes may occur as a result of the deposition of $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ onto the electrodes or by the deposition of the electrodes onto the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$.

5 Preferably the method of fabricating a device further comprises the step of doping the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$. Advantageously the method of fabricating a device comprises the step of doping the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ material in such a manner that a p-n junction is formed. In an alternative aspect the method of fabricating a device comprises the step of growing a passivating layer of CdTe on the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$.

10 According to a third aspect the invention provides a device obtainable by the above mentioned method of making a device. According to a fourth aspect the invention provides $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ or doped $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ obtainable by the above mentioned method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ by MOVPE. According to a fifth aspect, the
15 invention provides a new organotellurium compound, namely isopropylallyltelluride.

According to a sixth aspect the invention provides a method for the preparation of a tellurium or selenium compound of the formula RaMRb , where M is selenium or tellurium, and where Ra and Rb are different organic groups each independently
20 selected from C1 to C20 alkyl, alkenyl, or aryl; characterised in that the method comprises the step of reacting the compound RaMA , where A is an alkali metal, with the compound RbX , where X is halogen.

An advantage of this method is that the RaMRb is produced at relatively high yields
25 and purities.

Advantageously the method comprises the further step of reacting a compound ARa with M, thereby producing RaMA .

30 Preferably A is lithium, more preferably X is bromine, yet more preferably M is tellurium.

The invention will now be described, by way of example only, with reference to the following figures:

Figure 1 shows a schematic diagram of an arrangement for fabricating CT, MT, and CMT devices;
Figure 2 shows a typical MT layer grown with isopropylallyltelluride; and
Figures 3a, b, and c show three devices according to the invention.

The starting material for the preparation of isopropylallyltelluride was isopropyl lithium prepared by the method disclosed in EP 525 881 A1. A further method by which the isopropyl lithium compound could be prepared is described in the paper by H Gilman et al in J. Am. Chem. Soc. 1941, volume 63, p 2479. Over a period of 2 hours, a precooled (0°C) solution of 700 cm³ of iPrLi (2.13 moles dm⁻³ in pentane, 1.49 mole) was added dropwise with vigorous stirring to a cooled (0°C) suspension of 191.4g (1.50 mol) of elemental tellurium powder in 1.5 dm³ of THF. On complete addition, the cloudy solution was stirred for a further 1 hour at 20°C.

The iPrTeLi solution was recooled to 0°C and a precooled (0°C) solution of 130 cm³ (1.50 mol) of allyl bromide in 100 cm³ of THF was added dropwise over 1.5 hours. The resulting cloudy yellow solution was left to stir at ambient temperature overnight. The bulk of the solvents were removed by distillation under reduced pressure. The final ca. 500 cm³ of volatiles, containing the product, were collected by trap-to-trap distillation *in vacuo*. The pure product, a clear bright yellow liquid, was obtained by careful fractional distillation at low pressure (ca. 0.2 Torr) through a high efficiency (30 theoretical plate) Spaltrohr[®] distillation column. Overall yield of pure product = 88%.

A schematic diagram of the apparatus, shown in figure 1, is suitable for use in the deposition of a CMT, CT, or MT layer. The apparatus comprises a reaction vessel (1), bubblers (2, 3, and 4) and a number of valves (numbered 5 to 11). Essentially hydrogen is mixed with an organometallic compound or compounds. The mixture of gasses is then flowed over a substrate (12) contained in the reaction vessel (1). The reaction vessel (1) also contains a mercury reservoir (13). Heat is applied to the reaction vessel and to the mercury reservoir as required so that a CMT, MT, or CT layer is deposited upon the substrate (12).

10 Preparation of a CMT layer

CMT is grown by the interdiffused multilayer process (IMP) described in GB 2 146 633 B. The process involves the alternate growth of CT and MT. The CT and MT, which are in the form of very thin layers, are then interdiffused to produce CMT. The CT layers can be deposited even in the presence of mercury vapour so that the alternate layers are fabricated simply by interrupting the supply of the organocadmium compound. When the organocadmium compound is present the CT layer is deposited, when it is absent the MT layer is deposited. The value of x in the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ produced by the IMP process is determined by the relative thicknesses of the CT and MT layers.

A bubbler (2) contains dimethylcadmium and a second bubbler (3) contains isopropylallyltelluride. Hydrogen is passed through valve (5) and flows towards the reaction vessel. Hydrogen is also passed through the isopropylallyltelluride bubbler (3) by means of valves (7) and (10) and becomes mixed with the organotelluride compound. The hydrogen/organotelluride mixture is diluted by the hydrogen that has passed through the valve (5) and passes into the reaction vessel (1). Valves 8 and 11 are alternately held open and closed. When valves (8) and (11) are open hydrogen passes through the bubbler (2) and becomes mixed with dimethylcadmium. The dimethylcadmium/hydrogen becomes mixed with the other gasses and flows into the reaction vessel (1).

A mercury reservoir (13) and substrate (12) are placed in the reaction vessel (1). The temperature of the vessel wall in the vicinity of the substrate (12) is maintained at a temperature equal to or greater than the mercury vessel temperature. A water cooling jacket (not shown) at one end of the vessel (1) condenses out the unreacted mercury and prevents overheating of the reaction vessel (1). The exhaust vapour stream (14) is then mixed with a further stream of hydrogen and passed through an activated graphite filter to remove unreacted material and by-products.

The partial pressures of the organometallic compounds are controlled by controlling the flow of hydrogen through the valve (5) and through the bubblers (2) and (3). They are also controlled by controlling the temperatures of the bubblers (2) and (3). The apparatus will typically also comprise by-pass lines (not shown in figure 1) that allow hydrogen to pass through the apparatus while preventing its flow through the bubblers.

The substrate comprises a buffer layer of epitaxial CdTe grown on (100) GaAs or on (100) GaAs mis-oriented, for example 2° towards either (110) or (111)B.

The isopropylallyltelluride partial pressure was 1.7 Torr during the MT part of the cycle and 1.2 Torr for the CT part of the cycle. The Cd:Te ratio for the CT part of the cycle was 1.6. The MOVPE growth temperature was 300°C. In this way a layer thickness of 4.5 µm was obtained after growth of 25 IMP cycles. It proved possible to vary the composition of the CMT ie x by altering the ratio of the CdTe and HgTe IMP times. The precursor ratios given in this section and in the CT and MT preparation section below are based on an estimated vapour pressure of 1.7 Torr at 25°C for the isopropylallyltelluride and on a vapour pressure of 36 Torr at 25°C for dimethylcadmium.

Preparation of a MT and CT Layer

The thicknesses quoted for MT and CT layers described below, were obtained after 20 minutes of growth and were measured by examination of a cleaved edge under
5 a microscope.

The apparatus of figure 1 can also be used to fabricate CT and MT layers. For a CT layer or layers the mercury reservoir remains present in the reaction vessel. It is possible to grow the CT with or without the application of heat to the mercury
10 reservoir (13). For an MT layer the flow of hydrogen through the bubbler containing the dimethylcadmium is prevented, so that no dimethylcadmium is present in the reaction vessel. The substrate and buffer layer used also remain unchanged.

For the preparation of MT the gas stream in the reaction vessel either had the
15 same composition as that which left the isopropylallyltelluride bubbler or was slightly diluted by passing hydrogen through the valve (5). The growth rate for MT was found to be around 10 μm per hour at MOVPE growth temperatures of 290 to 325°C. An image of the surface of a typical MT layer grown with isopropylallyltelluride is shown in figure 2.

20 For the deposition of CT the Me_2Cd : isopropylallyltelluride ratio was varied between 0.26 and 2.7 by varying the Me_2Cd partial pressure between 0.35 and 2.92 Torr. (It should be noted that the 0.26 ratio resulted in no CT being deposited). The partial pressure of the isopropylallyltelluride was held at approximately 1.3
25 Torr. In this way 2.5 μm thick films of epitaxial CT were grown on top of the conventionally grown CT buffer layer. The MOVPE growth temperature, at which the 2.5 μm thick film was grown, was 325°C and the ratio of dimethylcadmium to isopropylallyltelluride was 1.6.

30 Keeping the temperature at 325°C and increasing the Cd:Te ratio to 2.7 resulted in layers of CT that were very dark grey in colour with an iridescent hue. Examination

under the microscope revealed them to consist mainly of coalesced bumps on top of some shinier material. It was concluded that the coalesced bumps were $7\mu\text{m}$ of polycrystalline CdTe. The ability to deposit polycrystalline CdTe efficiently at 300°C , perhaps onto glass substrates, may have applications for solar cells.

5

Dopants

The layer of CMT, MT, or CT grown on the substrate may include one or more dopants. The dopant can be introduced using the apparatus of figure 1. The organic compound of the dopant can be held in a bubbler (4) as shown in figure 1. The flow of the dopant into the reaction vessel (1) can be controlled by opening or closing the valves (6) and (9). With valves (6) and (9) open hydrogen is bubbled through the bubbler (4) and is mixed with the dopant compound. Alternatively a volatile hydride of the dopant in hydrogen may be used.

15

Examples of dopants and their hydrides are as follows: Si, Ge, As, and P from their respective hydrides: SiH_4 , GeH_4 , AsH_3 , and PH_3 . A supply of hydrides eg SiH_4 may be supplied direct from gas cylinders. The hydrides may optionally be diluted in hydrogen.

20

Examples of organic compounds of the dopants are as follows: Al, Ga, As, P, and I from the respective alkyls: $(\text{CH}_3)_3\text{Al}$, $(\text{CH}_3)_3\text{Ga}$, $(\text{CH}_3)_3\text{As}$, $(\text{CH}_3)_3\text{P}$, $\text{C}_2\text{H}_5\text{I}$, and $\text{C}_4\text{H}_9\text{I}$. A further good source of As is $\text{As}(\text{NMe})_3$.

25

Devices

Figure 3 shows three electronic devices according to the invention. Figure 3a shows a layer of semiconductor material (2) connected to two electrodes (1). The layer (2) may comprise CT, CMT, or MT and may be either n-type, p-type, or undoped. The device, shown in figure 3a, may form part of an infrared detector.

30

Such detectors operate by monitoring the change in conductivity of the layer (2) that occurs when the layer is exposed to infrared radiation.


Figures 3b and 3c show electronic devices that have one or more n-type regions (4), one or more p-type regions (3), and one or more electrodes (1) connected to the n-type and p-type regions. The n-type and p-type regions may be fabricated from CT, CMT, or MT. The devices of figures 3b and 3c operate by generating a potential difference between the n-type region or regions and the p-type region or regions (3) when the devices are illuminated with electromagnetic radiation. The potential difference can be used to detect the radiation or it can be used as a source of electric power.

Claims

1. A method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ onto a substrate, in a MOVPE technique, where $0 \leq x \leq 1$; comprising the step of reacting together a volatile organotellurium compound, and one or both of (i) a volatile organocadmium compound and (ii) mercury vapour; characterised in that the organotellurium compound is isopropylallyltelluride and in that the substrate is maintained at a temperature in the range 150°C to 350°C .
2. A method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ according to Claim 1 wherein the organocadmium compound is an alkyl cadmium compound.
3. A method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ according to Claim 2 wherein the alkyl cadmium compound is dimethyl cadmium.
4. A method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ according to Claim 1 wherein $0 < x < 1$.
5. A method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ according to Claim 1 wherein $x=0$.
6. A method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ according to Claim 1 wherein $x=1$.
7. A method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ according to Claim 6 wherein the reaction is carried out in the presence of mercury vapour.
8. A method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ according to Claim 1 wherein the substrate comprises glass, or glass coated with indium tin oxide, or CdTe, or CdZnTe, or GaAs, or GaAs/Si, or CdTe/GaAs, or Si.
9. A method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ according to Claim 1 wherein the temperature of the substrate is maintained at a temperature in the range 150°C to 300°C .

10. A method of depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ according to Claim 9 wherein the temperature of the substrate is maintained at a temperature in the range 250°C to 300°C .
11. A method of fabricating an electronic device comprising the steps of (a) depositing $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ onto a substrate by a method according to any one of Claims 1 to 10; and (b) connecting at least two electrodes to the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$.
12. A method of fabricating an electronic device according to Claim 11 wherein the method further comprises the step of doping the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$.
13. A method of fabricating an electronic device according to Claim 11 wherein method comprises the further step of doping the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ material in such a manner that a p-n junction is formed.
14. A method of fabricating a device according to one of Claims 11 or 12 wherein the method further comprises the step of growing a passivating layer of CdTe on the $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$.
15. A device obtainable by a method according to one of Claims 11 to 14.
16. An infrared detector comprising an array of devices, each device being obtainable by a method according to one of Claims 11 to 14.
17. $\text{Hg}_{1-x}\text{Cd}_x\text{Te}$ obtainable by a method according to one of Claims 1 to 10.
18. A method for the preparation of isopropylallyltelluride comprising the steps: (a) reacting a compound isopropyl lithium with Te, thereby producing isopropyl lithiumtelluride; and (b) reacting the isopropyl lithiumtelluride, produced by step (a), with allyl bromide.

Fig.1.

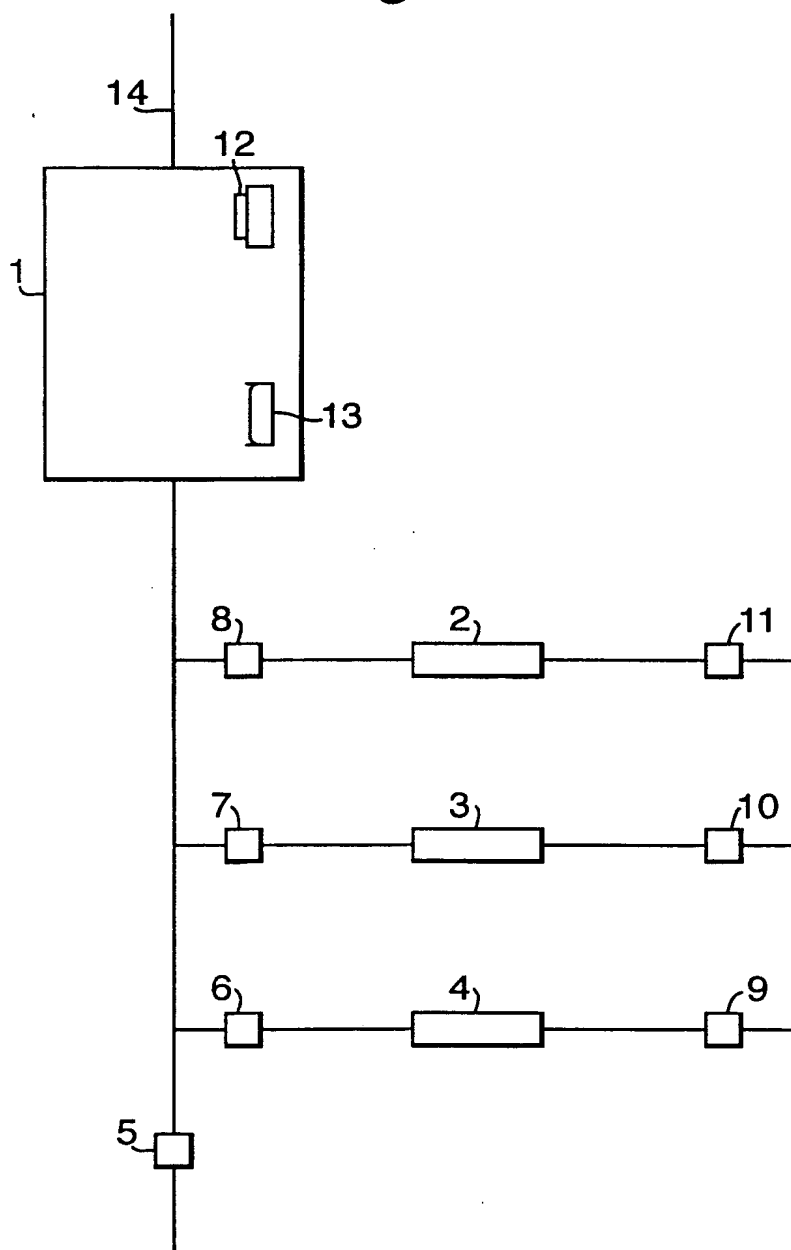

2/3

Fig.2.



3/3

Fig.3a.

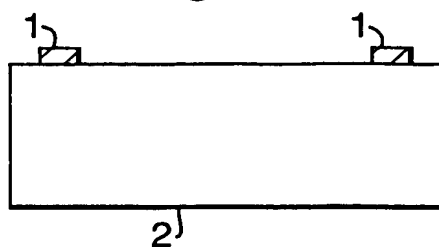


Fig.3b.


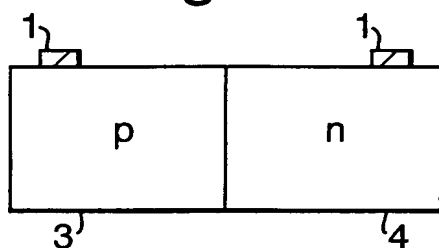


Fig.3c.

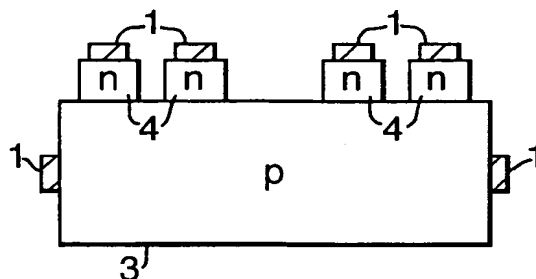

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/03249

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01L31/18 C30B25/02 C30B29/48

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01L C30B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

INSPEC, EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 285 834 A (AMERICAN CYANAMID CO) 12 October 1988 (1988-10-12) the whole document ----- -/--	1-6, 8-10, 17, 18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

16 November 2000

Date of mailing of the international search report

04/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Visentin, A

INTERNATIONAL SEARCH REPORT

Internat. Application No

PCT/GB 00/03249

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE CHEMICAL ABSTRACTS 'Online! COLUMBUS, OHIO, US; Abstract No: 112:97989 , 9 July 1989 (1989-07-09) GEDRIDGE, ROBERT W. ET AL.: " New organotellurium precursors for the pyrolytic and photolytic deposition of mercury cadmium telluride" XP002153037 abstract & MATERIALS RESEARCH SOCIETY SYMPOSIUM PROCEEDINGS, VOL. 131(CHEM. PERSPECT. MICROELECTRON. MATER.), 1989, pages 69-73, ---	1,4
A	J. E. HAILS ET AL.: "Methyl(allyl)telluride as a Te precursor for growth of (Hg,Cd)Te by metalorganic vapour phase epitaxy" JOURNAL OF CRYSTAL GROWTH., vol. 145, no. 1-4, December 1994 (1994-12), pages 596-601, XP002153036 NORTH-HOLLAND PUBLISHING CO. AMSTERDAM., NL ISSN: 0022-0248 the whole document ---	1-7,17
A	EP 0 525 881 A (FMC CORP) 3 February 1993 (1993-02-03) cited in the application the whole document ---	1,17,18
A	HAILS J E ET AL: "SCREENING OF ORGANOTELLURIUM COMPOUNDS FOR USE AS MOVPE PRECURSORS" JOURNAL OF CRYSTAL GROWTH,NL,NORTH-HOLLAND PUBLISHING CO. AMSTERDAM, vol. 107, no. 1 / 04, 1991, pages 319-324, XP000245842 ISSN: 0022-0248 the whole document ---	1-7,17
A	US 5 124 481 A (HIGA KELVIN T ET AL) 23 June 1992 (1992-06-23) the whole document ---	1-7,17
A	PATENT ABSTRACTS OF JAPAN vol. 012, no. 072 (E-588), 5 March 1988 (1988-03-05) & JP 62 214626 A (FUJITSU LTD), 21 September 1987 (1987-09-21) abstract --- -/--	1

INTERNATIONAL SEARCH REPORT

Internat. Application No
PCT/GB 00/03249

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 804 638 A (HOKE WILLIAM E ET AL) 14 February 1989 (1989-02-14) the whole document ---	1-11, 15-17
A	WO 90 15796 A (SECR DEFENCE BRIT) 27 December 1990 (1990-12-27) ---	
A	EP 0 045 258 A (TELECOMMUNICATIONS SA) 3 February 1982 (1982-02-03) ---	
P,X	HAILS J E ET AL: "Allyl-iso-propyltelluride, a new MOVPE precursor for CdTe, HgTe and (Hg,Cd)Te" JOURNAL OF CRYSTAL GROWTH, NORTH-HOLLAND PUBLISHING CO. AMSTERDAM, NL, vol. 214-215, June 2000 (2000-06), pages 45-49, XP004200961 ISSN: 0022-0248 the whole document -----	1-10,17

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat. Application No

PCT/GB 00/03249

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0285834	A	12-10-1988	DE 3865485 A	21-11-1991
			HK 65992 A	11-09-1992
			IE 61292 B	19-10-1994
			IL 85733 A	16-02-1992
			JP 63283032 A	18-11-1988
			MX 169875 B	29-07-1993
			SG 45392 G	12-06-1992
EP 0525881	A	03-02-1993	US 5211888 A	18-05-1993
			CA 2074613 A,C	27-01-1993
			CA 2074618 A	27-01-1993
			CA 2074618 C	31-10-1995
			DE 69225361 D	10-06-1998
			DE 69225361 T	29-10-1998
			DE 69226005 D	30-07-1998
			DE 69226005 T	03-12-1998
			EP 0525880 A	03-02-1993
			JP 2775239 B	16-07-1998
			JP 8081473 A	26-03-1996
			JP 1962630 C	25-08-1995
			JP 5202066 A	10-08-1993
			JP 6092418 B	16-11-1994
			JP 2551901 B	06-11-1996
			JP 5202074 A	10-08-1993
			US 5340507 A	23-08-1994
			US 5332853 A	26-07-1994
US 5124481	A	23-06-1992	US 5043477 A	27-08-1991
JP 62214626	A	21-09-1987	JP 1965837 C	25-08-1995
			JP 6097656 B	30-11-1994
US 4804638	A	14-02-1989	CA 1319587 A	29-06-1993
			DE 3743132 A	21-07-1988
			FR 2608637 A	24-06-1988
			GB 2199594 A,B	13-07-1988
			JP 63198336 A	17-08-1988
WO 9015796	A	27-12-1990	DE 69011115 D	01-09-1994
			DE 69011115 T	24-11-1994
			EP 0478590 A	08-04-1992
			ES 2056467 T	01-10-1994
			GB 2249790 A,B	20-05-1992
			JP 2673043 B	05-11-1997
			JP 4506514 T	12-11-1992
EP 0045258	A	03-02-1982	FR 2488048 A	05-02-1982
			DE 3172767 D	05-12-1985
			JP 1707310 C	27-10-1992
			JP 3045331 B	10-07-1991
			JP 57053633 A	30-03-1982